

912 Pendant

High Bay

Schedule ID	
Part Number	
Notes	

High lumen, remote power high bay pendant designed for use with EON 492 power supply



Product Description

This fully dimmable low-voltage LED high bay pendant features a black finish. This Class 2 solution contains no electronics in the fixture. The dimming control, power conversion and constant current drivers for multiple fixtures are housed in a remote DC, Class 2 intelligent power supply, which can be located up to 150' away from the fixtures.

Ideal applications: warehouse, industrial, commercial interiors. 15' to 30' mounting height

Performance Summary

Light Output	10,250 lumens
Drive Current	2100 mA
Forward Voltage	39 Vf max
CRI	80+ Standard, 90+ Optional
CCT	3000K, 3500K*, 4000K, 5000K*
L70 Lifetime	100,000+ hours
Warranty	5-year limited warranty
Dimming	Dimmable to 0.2%

Ordering Information Example: 912-N30W-10-B-9

Base	Beam	CCT	Shade	Mount	Finish	CRI
912	N Narrow (27°) M Medium (54°) W Wide (68°) Blank - No Optic	30 3000K 35 3500K* 40 4000K 50 5000K*	P Acrylic Prismatic W Wire Guard A Aluminum PA Painted Aluminum*	10 10' Steel Cable & Canopy 15 15' Steel Cable & Canopy 20 20' Steel Cable & Canopy 12 12" Stem 24 24" Stem 36 36" Stem 48 48" Stem	B Black	- 80 (Default Option, Leave Blank) 9 90

*Additional accessory and upgrade options available by special order only. Please consult with your LumaStream representative for pricing and lead times.

912 Pendant Specifications

Light Output

Drive Current	CCT	Lumens	Voltage	Watts	Fixtures/Ch	Fixtures/PS	CRI	Compatible Power Supplies
2100 mA	3000K	10,250	39	82	1	4	80+	94-04-2100-ANA-XX

**For 4000K lumen values multiply 1.07. For 90 CRI multiply lumen values by .8


Construction & Materials

Dimensions (H x D)	20 5/16" H x 16 5/8" D
Weight	8.1 lbs
Material	Aluminum
Mounting Options	Stem, Aircraft Cable

Certifications & Qualifications

TUV Certified to UL 1598	Yes
Suitable for Damp Locations	Yes
RoHS Compliant	Yes

Mechanical Specifications

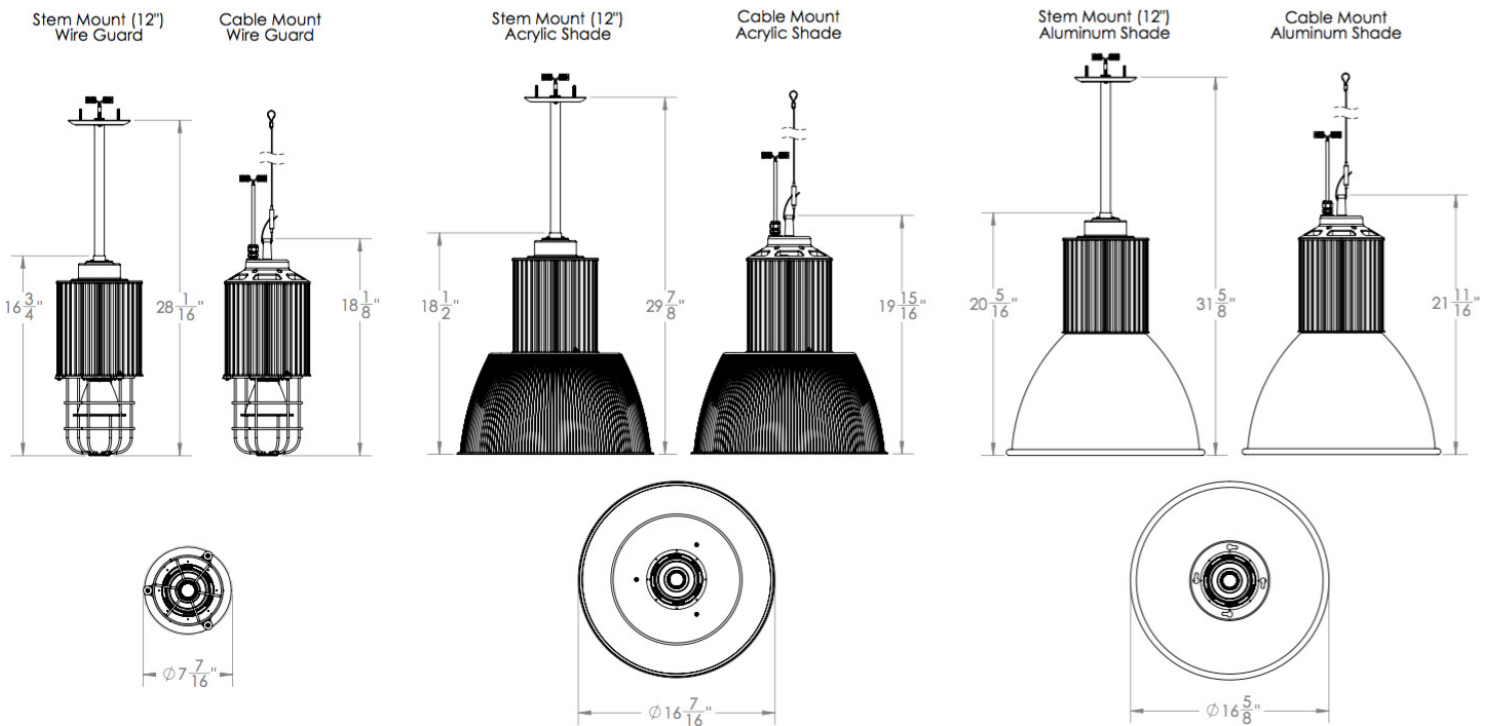

For more information, please contact:
+1 (727) 827-2805
sales@lumastream.com

LumaStream, Inc. reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. LumaStream does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.

LS0130 / 912 Pendant



Rev: 6/04/2018