

# RXDS Accent

## Double Swivel

Architectural uplighting for maximum adjustability.

Schedule ID	
Part Number	
Notes	



### Product Description

This fully dimmable low-voltage LED fixture features two compact swivel fixture heads on two 2" or 4" arms. This Class 2 solution contains no electronics in the fixture. The dimming control, power conversion and constant current drivers for multiple fixtures are housed in a remote DC, Class 2 intelligent power supply, which can be located up to 150' away from the fixtures.

**Ideal applications:** hospitality, retail, architectural lighting

### Performance Summary

Light Output	R3: 569 - 1105 lumens R4: 766 - 1488 lumens
CCT	2700K, 3000K, 3500K, 4000K
CRI	90+ (2700K, 3000K), 80+ (3500K, 4000K)
Drive Current	500 mA, 700 mA
Forward Voltage	R3: 18 Vf max R4: 24 Vf max
Lifetime	50,000+ hours
Warranty	5-year limited warranty
Dimming	Dimmable to 0.2%

### Ordering Information Example: R3DS-N30S-0206-C-CN

Base	Beam	CCT	Lens	Arm	Stem	Finish	Canopy
<b>R3DS</b>	<b>N</b> Narrow (18°)	<b>27</b> 2700K	<b>C</b> Clear	<b>02</b> 2" Arm	<b>06</b> 6" Stem	<b>C</b> Clear	<b>00</b> None
<b>R4DS</b>	<b>M</b> Medium (34°)	<b>30</b> 3000K	<b>S</b> Soft Diffuse	<b>04</b> 4" Arm	<b>12</b> 12" Stem	<b>B</b> Black	<b>CN</b> 5" Canopy
	<b>W</b> Wide (50°)	<b>35</b> 3500K					<b>RD</b> Round Canopy
	<b>O</b> None (105°)	<b>40</b> 4000K					<b>RT</b> Rect. Canopy

# RXDS Accent Specifications

## Light Output

LED Array	Drive Current	CCT**	Lumens	Voltage	Watts	Lumens/Watt	CRI
R3	500 mA	3000K	612	9	4.5	95	80+
R3	700 mA	3000K	784	9	6.3	88	80+
R4	500 mA	3000K	824	12	6	97	80+
R4	700 mA	3000K	1056	12	8.4	89	80+

\*\* For 2700K: multiply lumens by 0.93; 3500K: multiply lumens by 1.28; 4000K: multiply lumens by 1.41.

## Construction & Materials


Weight	0.83 lbs
Material	Milled Aluminum
Optics	Polycarbonate / Plastic
Lenses	Acrylic
Operating Temperature	-4°F to 113°F / -20°C to 45°C
Mounting Options	5" Canopy Standard Hole pattern fits standard octagon box with universal adapter

## Certifications & Qualifications

TUV Certified to UL 1598	Yes
Suitable for Damp Locations	Yes
RoHS Compliant	Yes
LM79 Tested	Yes

## Mechanical Specifications

## Universal Adapter

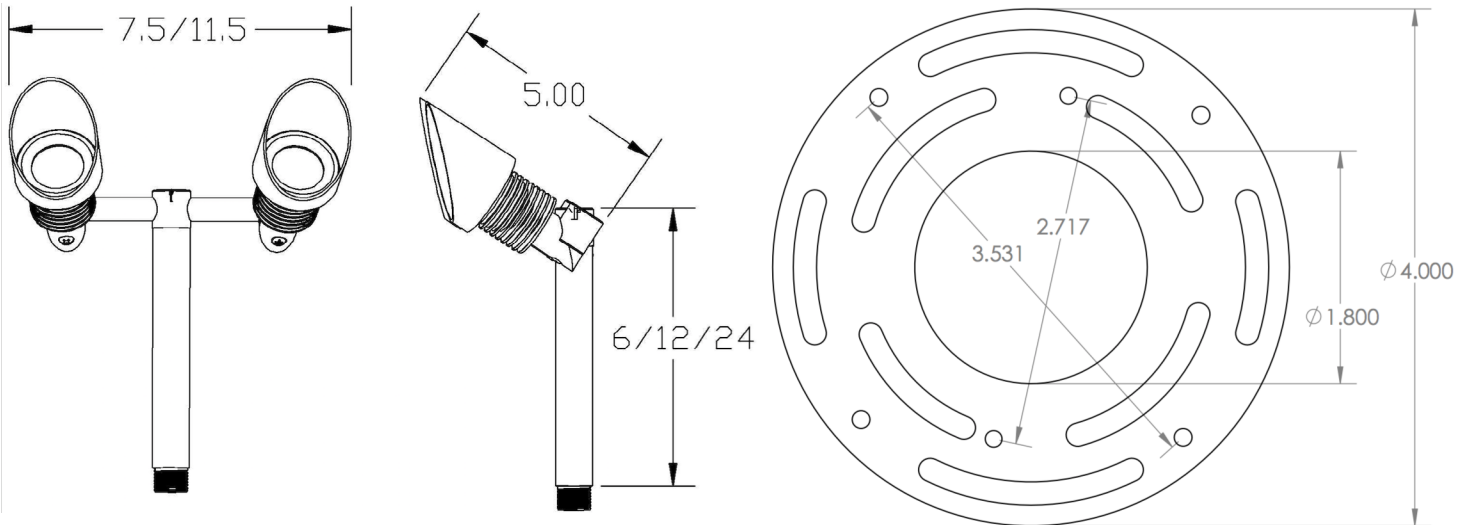

For more information, please contact:  
+1 (727) 827-2805  
sales@lumastream.com

LumaStream, Inc. reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. LumaStream does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.

LS0174 / RXDS Accent



Rev: 7/11/2017