


# 240 Pendant

## Linear Wall Wash

24 or 48 inch linear wall wash pendant.

|             |  |
|-------------|--|
| Schedule ID |  |
| Part Number |  |
| Notes       |  |

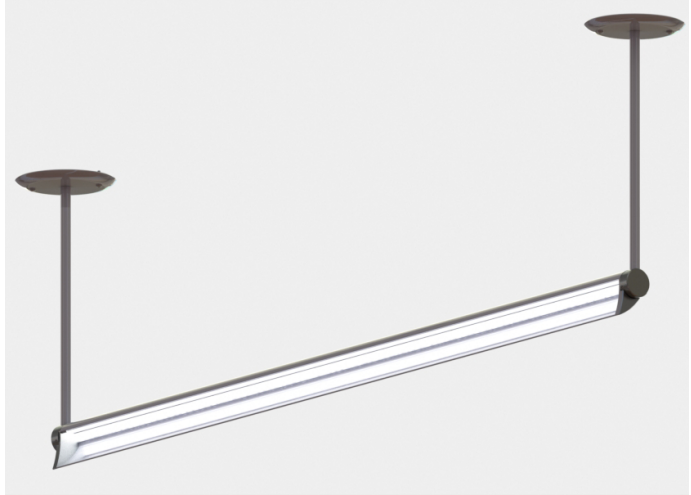

### Product Description

This fully dimmable low-voltage LED fixture features a linear design in either 24 inch or 48 inch lengths. The Class 2 solution contains no electronics in the fixture. The dimming control, power conversion and constant current drivers for multiple fixtures are housed in a remote DC, Class 2 intelligent power supply, which can be located up to 150' away from the fixtures.

**Ideal applications:** hospitality, retail, architectural lighting

### Performance Summary

|                 |                         |
|-----------------|-------------------------|
| Light Output    | 852 - 5644 lumens       |
| CCT             | 3000K, 4000K, 5000K     |
| CRI             | 90+ (3000K, 4000K)      |
| Drive Current   | 350 mA - 2100 mA        |
| Forward Voltage | 9 Vf, 18 Vf             |
| L70 Lifetime    | 50,000+ hours           |
| Warranty        | 5-year limited warranty |
| Dimming         | Dimmable to 0.2%        |

\*See lumen chart for current and voltage compatibility.

### Ordering Information Example: 242-030S-12C

| Base                 | Beam               | CCT             | Lens                  | Pendant Length       | Finish                | Canopy                                       |
|----------------------|--------------------|-----------------|-----------------------|----------------------|-----------------------|--|
| <b>242</b> 24 Inches | <b>O</b> Wall Wash | <b>30</b> 3000K | <b>B</b> Baffle       | <b>12</b> 12 Inches  | <b>B</b> Black        | - 5" Canopy<br>(Default Option, Leave Blank) |
| <b>244</b> 48 Inches |                    | <b>40</b> 4000K | <b>C</b> Clear        | <b>24</b> 24 Inches  | <b>C</b> Clear/Silver |  |
|                      |                    | <b>50</b> 5000K | <b>S</b> Soft Diffuse | <b>30</b> 30 Inches  | <b>W</b> White        | <b>02</b> 2" Canopy                          |
|                      |                    |                 |                       | <b>36</b> 36 Inches  |                       |  |
|                      |                    |                 |                       | <b>39*</b> 39 Inches |                       |  |
|                      |                    |                 |                       | <b>48</b> 48 Inches  |                       |  |

\*Custom Downrod

# 240 Pendant Specifications

## Light Output

| 24" at 4000K |        |       |       |         | 48" at 4000K |        |       |       |
|--------------|--------|-------|-------|---------|--------------|--------|-------|-------|
|              | Lumens | Watts | Volts |         |              | Lumens | Watts | Volts |
| 350 mA       | 414    | 3.2   | 9     | TRINITY | 350 mA       | 828    | 6.4   | 18    |
| 500 mA       | 569    | 4.6   | 9     |         | 500 mA       | 1138   | 9.1   | 18    |
| 700 mA       | 777    | 6.4   | 9     |         | 700 mA       | 1554   | 12.7  | 18    |
| 1000 mA      | 1092   | 9.1   | 9     |         | 1000 mA      | 2184   | 18.2  | 18    |
| 1400 mA      | 1478   | 12.7  | 9     |         | 1400 mA      | 2956   | 25.5  | 18    |
|              |        |       |       | EON     |              |        |       |       |
| 2100 mA      | 2159   | 19.1  | 9     |         | 2100 mA      | 4319   | 38.2  | 18    |


## Construction & Materials

|                        |  |
|------------------------|--|
| Dimensions (H x W x D) | 1.47" x 2.95" x 24"; 1.47" x 2.95" x 48"   |
| Weight                 | 1.5 lbs to 3 lbs   |
| Housing, Finish        | Powder Coated Aluminum   |
| Optics                 | Wall Wash Asymmetric   |
| Lenses                 | Polycarbonate, Clear and Soft Diffuse, Baffle Lens                               |
| Operating Temperature  | -4°F to 113°F / -20°C to 45°C  |
| Mounting Options       | 12", 24", 36", 39" or 48" Downrods on 5" Canopy (standard), 2" Canopy (optional) |

## Certifications & Qualifications

|                             |     |
|-----------------------------|-----|
| TUV Certified to UL 1598    | Yes |
| Suitable for Damp Locations | Yes |
| RoHS Compliant              | Yes |

## Mechanical Specifications

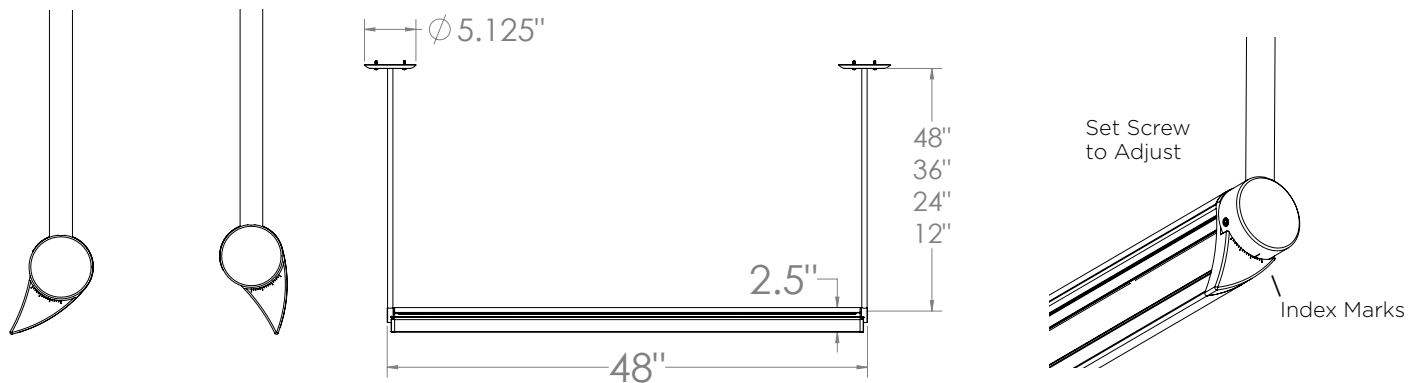

For more information, please contact:

+1 (727) 827-2805

sales@lumastream.com

LumaStream, Inc. reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. LumaStream does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.

LS0217 / 240 Pendant



Rev: 8/24/2017