

# R4RA Accent

## Right Angle

Simple accent light for interior or exterior architectural lighting.

Schedule ID	
Part Number	
Notes	



### Product Description

This fully dimmable low-voltage LED fixture features a 90° wall mount configuration with full movement base via adjustable set screws, perfect for up and down lighting applications. The Class 2 solution contains no electronics in the fixture. The dimming control, power conversion, and constant current drivers for multiple fixtures are housed in a remote DC, Class 2 intelligent power supply, which can be located up to 150' away from the fixtures.

**Ideal applications:** hospitality, retail, architectural lighting

### Performance Summary

Light Output	R4: 383 - 745 lumens
CCT	2700K, 3000K, 3500K, 4000K
CRI	90+ (2700K, 3000K), 80+ (3500K, 4000K)
Drive Current	500 mA, 700 mA
Forward Voltage	R4: 12 Vf max
L70 Lifetime	50,000+ hours
Warranty	5-year limited warranty
Dimming	Dimmable to 0.2%

### Ordering Information Example: R4RA-N30S-0200-B

Base	Beam	CCT	Lens	Arm	Canopy	Finish
<b>R4RA</b>	<b>N</b> Narrow (18°) <b>M</b> Medium (34°) <b>W</b> Wide (50°) <b>O</b> None (105°)	<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>C</b> Clear <b>S</b> Soft Diffuse	<b>02</b> 2" Arm <b>04</b> 4" Arm	<b>00</b> None <b>02</b> 2" Canopy <b>05</b> 5" Canopy	<b>C</b> Clear (Brushed Aluminum) <b>B</b> Black

# R4RA Accent Specifications

## Light Output

LED Array	Drive Current	CCT**	Lumens	Voltage	Watts	Lumens/Watt	CRI
R4	500 mA	3000K	412	12	6	97	80+
R4	700 mA	3000K	528	12	8.4	89	80+

\*\* For 2700K: multiply lumens by 0.93; 3500K: multiply lumens by 1.28; 4000K: multiply lumens by 1.41.

## Construction & Materials



Weight	0.35 lbs
Material	Milled Aluminum
Optics	Polycarbonate / Plastic
Lenses	Acrylic
Operating Temperature	-4°F to 113°F / -20°C to 45°C
Mounting Options	5" Canopy Standard, 2" Canopy, Rail Optional

## Certifications & Qualifications

TUV Certified to UL 1598	Yes
Suitable for Damp Locations	Yes
RoHS Compliant	Yes
LM79 Tested	Yes

## Mechanical Specifications

## Universal Adapter

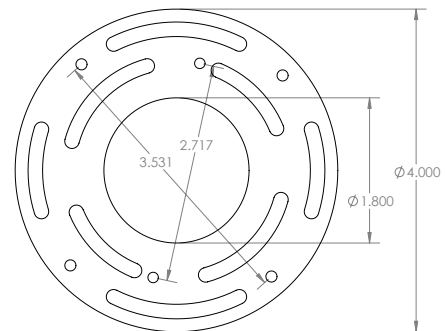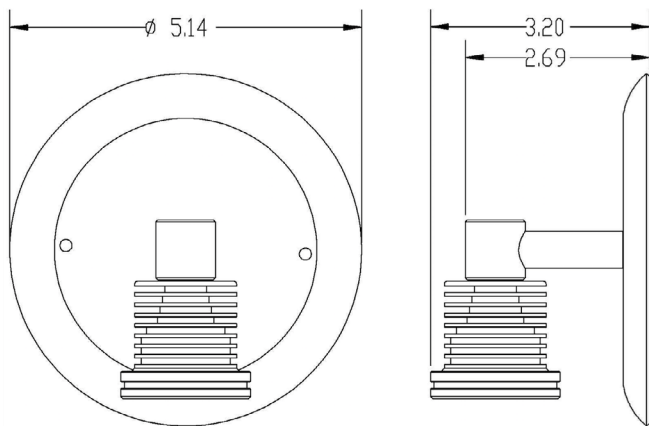

For more information, please contact:

+1 (727) 827-2805

sales@lumastream.com

LumaStream, Inc. reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. LumaStream does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.

LS0163 / R4RA Accent



Rev: 08/04/2017