

# Double Gimbal Pendant

## Multi-headed pendant

Architectural-grade, double gimbal pendant. Superior efficiency & reliability.

### Product Description

This Class 2 solution contains no electronics in the fixture. The dimming control, power conversion and constant current drivers for multiple fixtures are housed in a remote DC, Class 2 intelligent power supply, which can be located up to 150' away from the fixtures.

**Ideal applications:** hospitality, retail, architectural lighting.

Schedule ID	
Part Number	
Notes	



### Performance Summary

Light Output	1260-2500 lumens (per head)
CCT	2700K, 3000K, 3500K, 4000K
CRI	93+
Drive Current	350 mA, 700 mA
Compatible Power Supplies	70-09-0500-XXX 70-08-0700-XXX
Forward Voltage	36.3 Vf max (per head)
Lifetime	50,000+ hours
Warranty	5-year limited warranty
Dimming	Dimmable to 0.2%

\*Please consult with your LumaStream account manager for pricing and lead times.

### Ordering Information Example: 393-N35-1005-C

Base	Beam	CCT	Cord	Canopy	Canopy Finish
<b>391</b> 1 Head per Fixture	<b>VN</b> Very Narrow 15	<b>27</b> 2700K	<b>10</b> 10' Cord	<b>05</b> 5" Canopy	<b>C</b> Silver / Clear Anodized
<b>392</b> 2 Heads per Fixture	<b>N</b> Narrow 22	<b>30</b> 3000K			<b>B</b> Black Anodized
<b>393</b> 3 Heads per Fixture	<b>M</b> Medium 32	<b>35</b> 3500K			
<b>394</b> 4 Heads per Fixture	<b>W</b> Wide 54	<b>40</b> 4000K			

# 390 Double Gimbal Pendant Specifications

## Light Output

Drive Current	CCT**	Lumens	Voltage	Watts	Lumens/Watt	CRI
500 mA	3500K	1416	35	17.5	80.9	93+
700 mA	3500K	1867	36.5	25.55	73.4	93+

\*\*For 2700K: multiply lumens by 0.92; 3500K: multiply lumens by 1.26; 4000K: multiply lumens by 1.33.

## Construction & Materials


Weight	3 lbs per head (includes frame)
Material	Milled Aluminum
Optics	Anodized Aluminum
Lenses	None
Operating Temperature	-4°F to 113°F / -20°C to 45°C
Mounting Options	Pendant Mount

## Certifications & Qualifications


TUV Certified to UL 1598 - CE	Yes
Suitable for Damp Locations	Yes
RoHS Compliant	Yes
LM79 Tested	Pending

## Mechanical Specifications

Example: 393 Fixture Dimensions

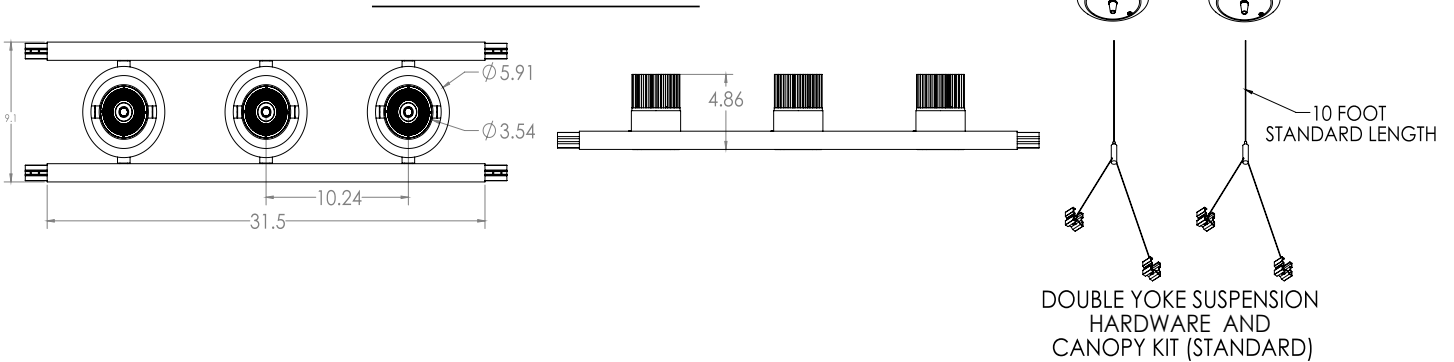

ASSEMBLY WITH THREE 393 FIXTURES AND ACCESSORY RAIL KIT

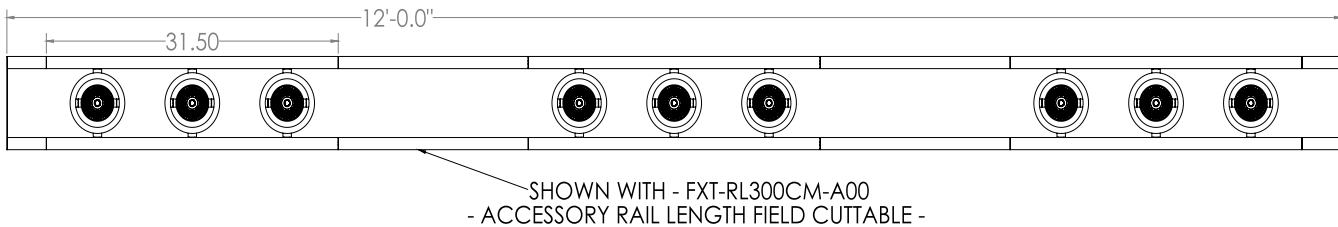

SHOWN WITH - FXT-RL300CM-A00  
- ACCESSORY RAIL LENGTH FIELD CUTTABLE -

For more information, please contact:  
+1 (727) 827-2805  
sales@lumastream.com

LumaStream, Inc. reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. LumaStream does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.



Rev: 4/04/2018