


LumaSTREAM[®] Parallax

1' X 4' Conference Room Fixture

Schedule ID	
Part Number	
Notes	

Suspended, linear fixture, which can be adjoined to run continuously.

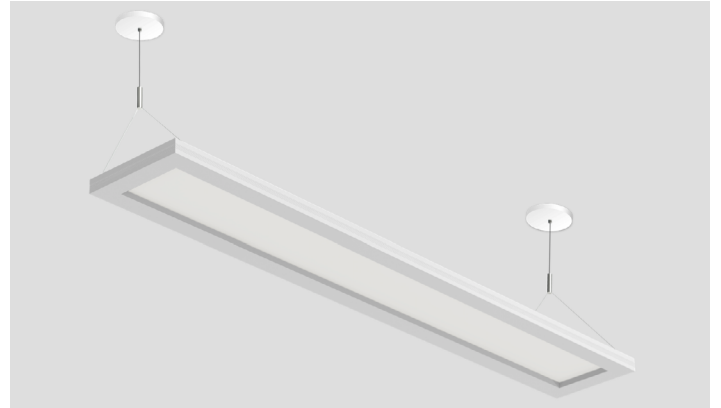

Product Description

This fully dimmable low-voltage LED fixture features a 1' x 4' linear design and a unique optical system that is translucent until the fixture is energized. The optical system provides excellent uniformity and distributes 55% of generated light in a downward direction and 45% for uplighting.

Ideal applications: conference rooms, hallways, open offices

Performance Summary

Light Output	Downlighting: 2700 lumens Uplighting: 2000 lumens
Drive Current	450 mA - 700 mA
Forward Voltage	38 Vf
CRI	80+ Standard, 90+ Optional
CCT	3500K, 4000K, 5000K
L70 Lifetime	50,000+ hours
Warranty	5-year limited warranty
Dimming	Dimmable to 0.2%

Ordering Information Example: LSF14-35-W

LSF14	-		-	
Base	CCT*		Finish	
LSF14	35	3500K	W	White
	40	4000K		
	50	5000K		

*Additional CCT options available by special order. Please consult your LumaStream representative for availability and lead times.

Parallax LSF-14 Specifications

Light Output


Construction & Materials

Dimensions (H x W x D)	1.06" x 11.81" x 47.24"
Weight	13.0 lbs
Housing, Finish	White
Lenses	Transparent Up/Down Optic
Operating Temperature	-4°F to 104°F / 0°C to 40°C
Mounting Options	Suspended

Certifications & Qualifications

TUV Certified to UL 1598	Pending
Suitable for Damp Locations	Yes
RoHS Compliant	Yes
LM79 Tested	Pending

Mechanical Specifications

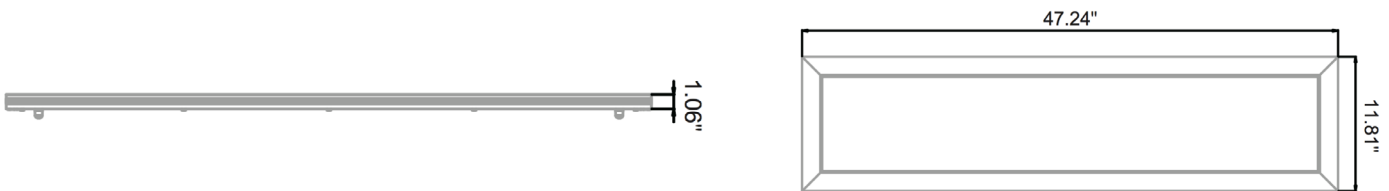

For more information, please contact:

+1 (727) 827-2805

sales@lumastream.com

LumaStream, Inc. reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. LumaStream does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.

LS0218 / Parallax LSF14



Rev: 8/11/2018